INSTALLATION INSTRUCTIONS





KAWASAKI ZX14R | 2016 Q4418

1>READ

WARNINGS > INSTALLING



- We strongly suggest that an experienced technician install this product.
- Read through all instructions before beginning installation.
- This document is intended for use by qualified technicians.
- This is not a replacement for the factory Engine Control Unit (ECU).
- Refer to a factory service manual for more specific stock component identification/location information and removal/assembly procedures.

WARNINGS > USING



- Use only in race or other closed-course applications and never on public roads.
- Z-Fi products are not certified by the California Air Resource Board (CARB) for use on CA public lands.

GETTING HELP




- Factory support is available in the US at 909-597-8300.
- For fastest support outside of the US, find your local importer at bazzaz.net.

2>IDENTIFY

INCLUDED PARTS

- 1. QS4USB control unit
- 2. QS4USB harness
- 3. Shift Switch and mounting hardware
- 4. USB cable
- 5. Scotchlok (1)
- 6. Zip ties
- 7. Velcro

QS4USB HARNESS

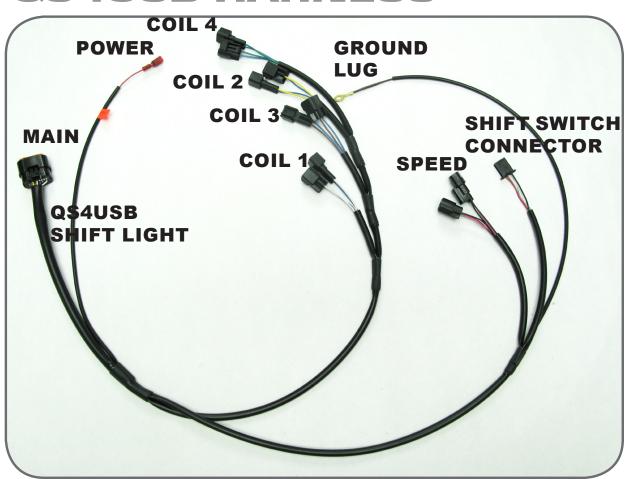


3>REMOVE

- 1. Rider seat
- 2. Fuel tank
- 3. Side panels


4>SECURE

1. Mount the control unit in the tail section of the bike and under the factory ECU, securing it with the provided Velcro.

5>CONNECT

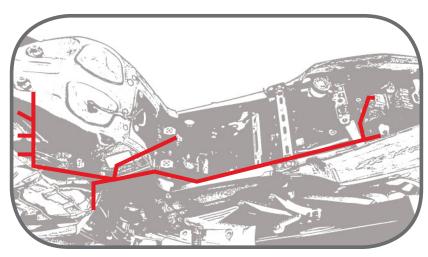


 Connect the main connector of the Bazzaz QS4 harness to the control unit.

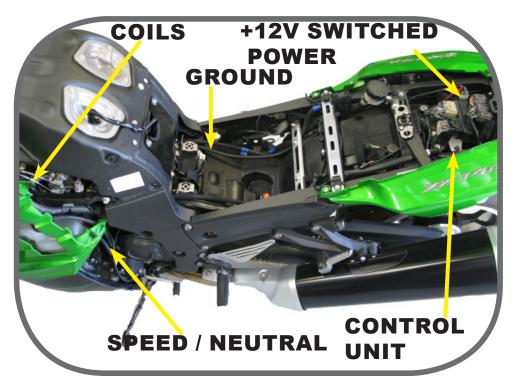

5>CONNECT (CONT.)

5.1

1. Locate the factory black three pin GPS connector located on the left hand side of the bike. Once found disconnect the factory GPs connector and install the Bazzaz inline.

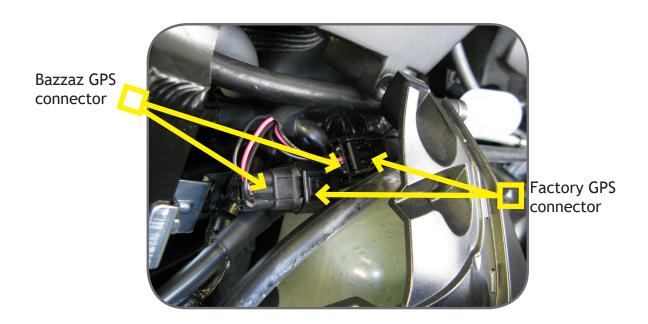

5.2


1. Locate a suitable chassis ground and secure the Bazzaz ground to it.



5>CONNECT (CONT.)


5.3

- 1. Locate the factory diagnostic connector in the tail section of the bike.
- 2. Crimp a supplied Scotchlok onto the brown/white wire of the factory connector.
- 3. Insert the Bazzaz POWER connector into the Scotchlok.

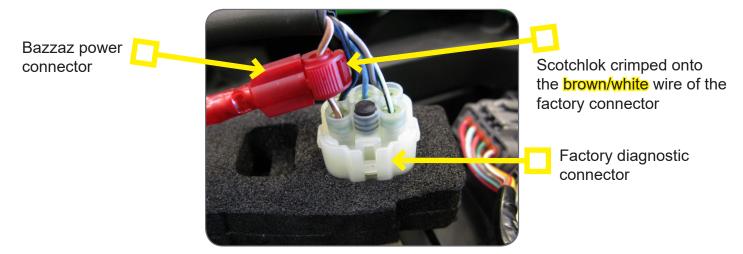

5.4

- 1. From left to right, unplug the factory coil connectors from the stick coils.
- 2. Plug the Bazzaz COIL connectors in-line, between the factory connectors and stick coils. Start with the Bazzaz # 1 coil connectors having the blue and green wires.

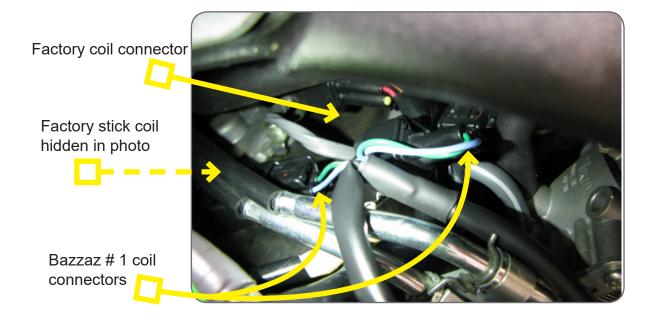

8>QUICKSHIFT

- 1. In order to install the quickshiftter, aftermarket rearsets must be used. Install the SHIFT SWITCH (installation of shift switch will vary depending on brand of rearsets).
- 2. Route and connect the shift switch connector to the mating connector on the Bazzaz coil harness.

9>SECURE



Use the supplied cable ties to secure the harness neatly along the routing path free of any moving or hot components (which could cause damage or failure of the system).

10>CHECK



- 1. In order to check that the system is installed correctly, download the Bazzaz Z-Fi Mapper software at bazzaz.net.
 - 2. Plug the USB cable into the control unit and computer.
 - 3. Locate and open the Z-Fi Mapper software.
 - 4. Start the vehicle and begin to check that the following inputs read correctly on the fuel map page.
 - RPM Make sure that the RPM is reading near what the vehicle is idling at.
 - GPS The vehicle should read neutral (or whichever gear it is in). For motorcycles that use a Gear Position Sensor, the bike does not need to be running to do this. For motorcycles that use a speed sensor, the wheel must be spinning to read gear properly. This can be checked on a dynamometer or by using a rear stand. Use caution when testing componentry.

Also use software to:

- Save and load new quickshift maps
- View diagnostics for troubleshooting
- Change quickshift settings

10>CHECK (CONT.)



If any problem is found, please carefully follow through the installation steps again.



If problem still persists, please contact Bazzaz tech support

- Factory support is available in the US at 909-597-8300.
- · For fastest support outside of the US, find your local importer at bazzaz.net

11>REINSTALL

After it is determined that everything is correct, reinstall the components removed in step 3.

12>NEXT LEVEL QS4 USB SHIFT LIGHT

Purchased separately.

Illuminates to identify pre-determined, optimal shift points. Comes pre-programmed with suggested figures that can be easily adjusted as desired. 79.95





THE SMARTEST PERFORMANCE TUNING TECHNOLOGY



Q4418