




**2006-2013 YZF R6 Z-Fi INSTALLATION INSTRUCTIONS**  
**P/Ns 127016, F740**

**WARNING!**

**USE ONLY IN RACE OR OTHER CLOSED COURSE APPLICATIONS AND NEVER ON PUBLIC ROADS**

Z-Fi products do not meet California CARB highway requirements

**Z-Fi CONTROL UNIT  
FUEL HARNESS  
DOWNLOAD Z-Fi MAPPER SOFTWARE & ITS INSTRUCTIONS FROM WEBSITE  
USB CABLE  
SCOTCHLOK  
SWINGARM STICKERS**

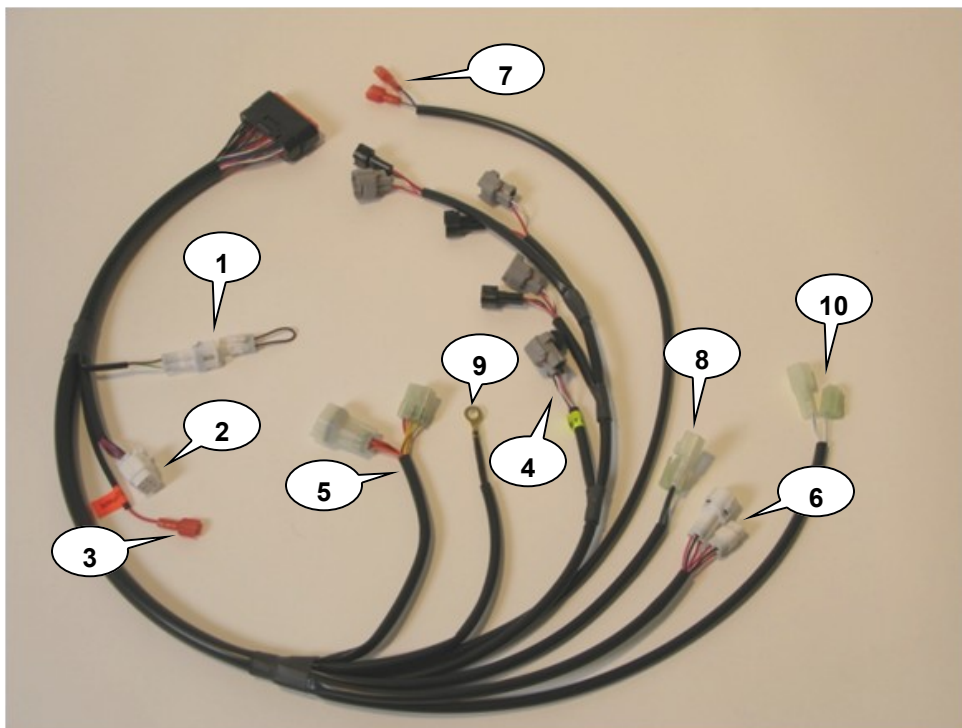

- (1) MAP SELECT
- (2) ZAFM CONNECTOR
- (3) SWITCHED POWER (RED TAG)
- (4) LOWER INJECTORS (YELLOW TAG)
- (5) UPPER INJECTORS
- (6) SPEED SENSOR
- (7) THROTTLE POSITION SENSOR
- (8) CRANK POSITION
- (9) GROUND LUG
- (10) NEUTRAL DETECT SENSOR

*Read through all instructions before beginning installation.  
This is not a replacement for the ECU.*

**WE STRONGLY SUGGEST THAT AN EXPERIENCED TECHNICIAN  
INSTALL THIS BAZZAZ PRODUCT**

1. Place the Z-Fi control unit in the tail section of the bike.
2. Route the fuel harness on the left hand side of the bike.
3. Plug the Z-Fi harness in-line with the lower injectors (yellow tag on harness is CYL # 1 lower injector).

**WARNING! Make sure that the Z-Fi harness injector male pins make proper contact with the stock harness injector connectors.**

4. Plug the Z-Fi harness in-line with the upper injectors.

**WARNING! Make sure that the Z-Fi harness injector male pins make proper contact with the stock harness injector connectors.**

5. Locate the throttle position sensor. Pull back the insulation and expose the (1) black/blue and the (2) blue wire. Connect the blue wire from the Z-Fi harness to the blue wire on the OEM harness. Now connect the gray wire from the Z-Fi harness to the black/blue wire on the OEM harness using the supplied scotchlok. (Photo 1)

**WARNING! Proper alignment of the T-tap terminal with the scotchlok is critical for proper operation.**

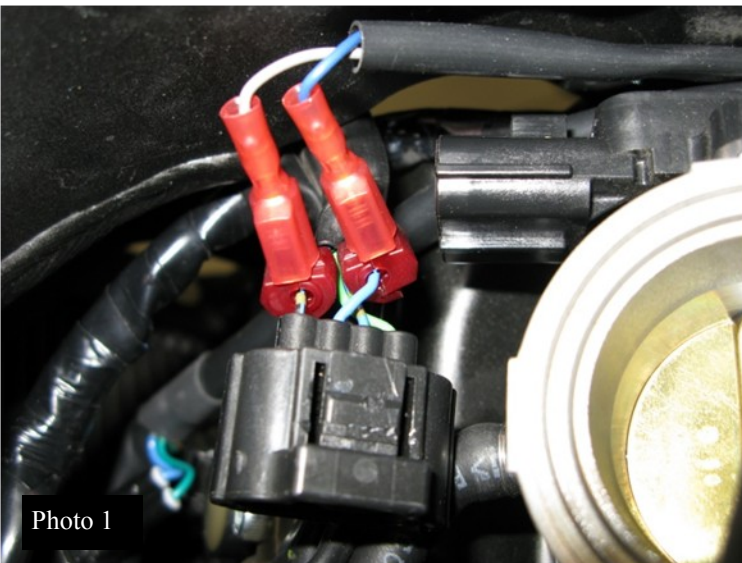


Photo 1

6. Plug the Z-Fi harness in-line with the Crank Sensor. (Photo 2)


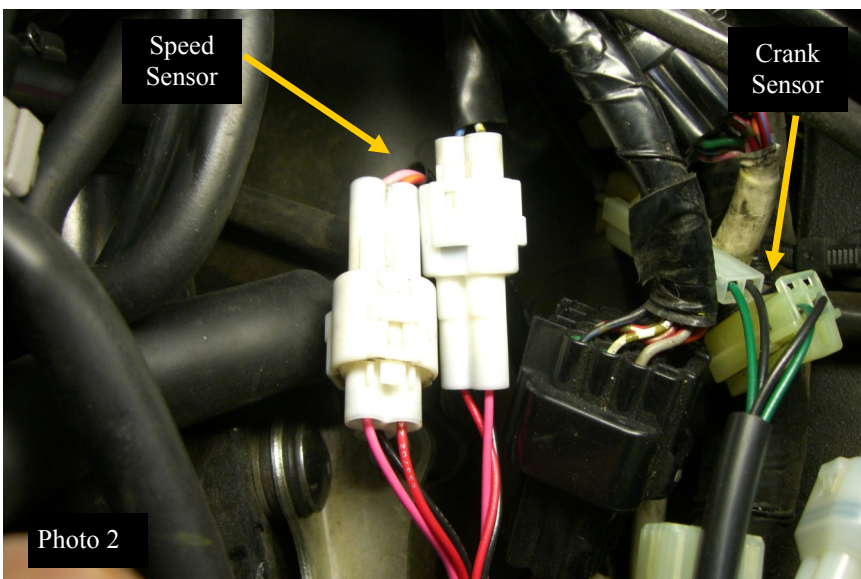


Photo 2

7. Plug the Z-Fi harness in-line with the Speed Sensor. (Photo 2)

8. Plug the Z-Fi harness in-line with the Neutral Detect Sensor. (Photo 3)

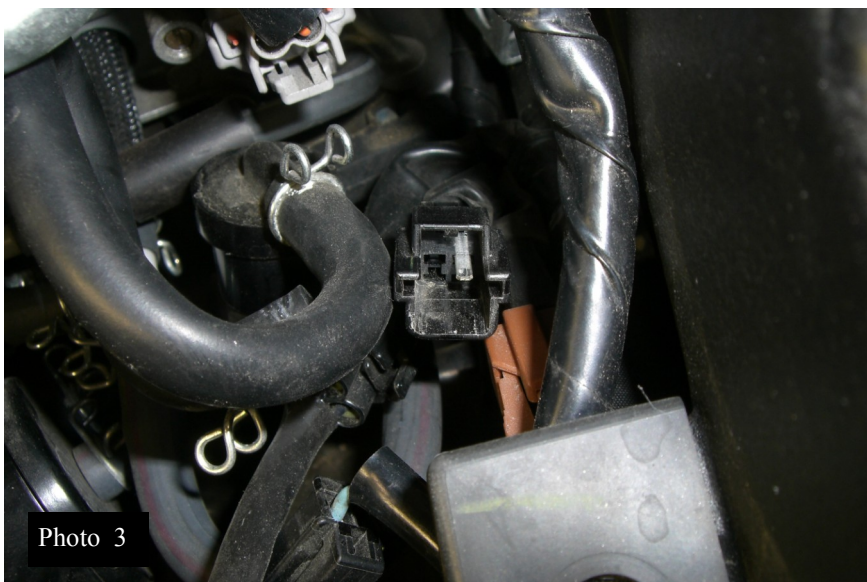

9. Attach the ground lug from the Z-Fi to the crankcase using one of the crankcase bolts.


10. Locate the rear brake light connector (3 pin white triangle connector). Pull back the insulation to expose blue/red wire. Using supplied scotchlok now connect the switched power (red tag) from the Z-Fi harness to the blue/red wire on the OEM harness.

**WARNING! Proper alignment of the T-tap terminal with the scotchlok is critical for proper operation.**


11. Disconnect the stock O2 sensor from the OEM harness and leave unplugged

12. If any problem is found, please carefully follow through the installation steps again. If problem still persists, please call Bazzaz tech support department at (909) 597-8300.

The Bazzaz Z-Fi controller is capable of storing two maps. These maps can be selected through the use of a map select switch which can be mounted on the handlebar for easy access and can be purchased separately. Or these maps can be selected by connecting or disconnecting the map select jumper supplied with kit. When the map select jumper is connected the control unit is operating using map 1. When the map select jumper is disconnected the control unit is operating using map 2.



Map 1



Map 2

**\* To create the ideal map(s) we recommend using the optional Z-AFM self-tuning module. \***