

INSTALLATION INSTRUCTIONS



UNLEASH.

THE SMARTEST PERFORMANCE TUNING TECHNOLOGY

ZFI TC FUEL + QS + TRACTION CONTROL

**KAWASAKI Z900/Z900RS | 2017-2018
T494**

1>READ

WARNINGS > INSTALLING



- We strongly suggest that an experienced technician install this product.
- Read through all instructions before beginning installation.
- This document is intended for use by qualified technicians.
- This is not a replacement for the factory Engine Control Unit (ECU).
- Refer to a factory service manual for more specific stock component identification/location information and removal/assembly procedures.

WARNINGS > USING



- Use only in race or other closed-course applications and never on public roads.
- Z-Fi products are not certified by the California Air Resource Board (CARB) for use on CA public lands.

GETTING HELP



- Factory support is available in the US at 909-597-8300.
- For fastest support outside of the US, find your local importer at bazzaz.net.


2>IDENTIFY

INCLUDED PARTS

1. Z-Fi TC control unit
2. Fuel harness
3. Coil harness
4. Shift switch
5. Shift Rod
6. +12v Sw. Power Adapter **(For Z900 only)**
7. USB cable
8. Zip ties
9. Velcro

FUEL HARNESS

1. Main
2. +12v Sw. Power
3. ZAFM
4. Map Select
5. Ground
6. CKPS/RPM
7. GPS
8. Injectors
9. TPS

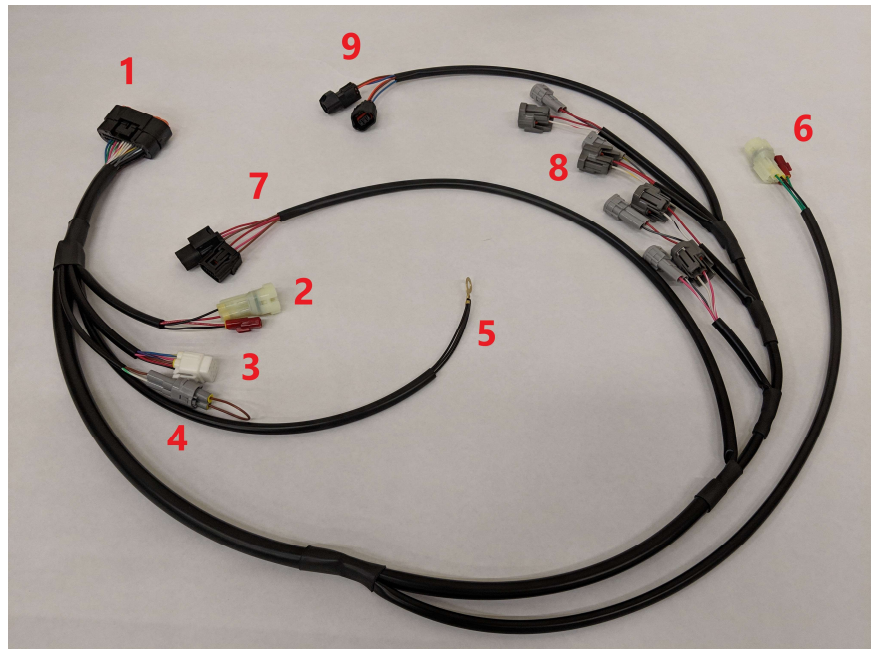


COIL HARNESS

1. Main
2. TC Active Light
3. Shift Switch
4. Coil




2>IDENTIFY (CONT.)

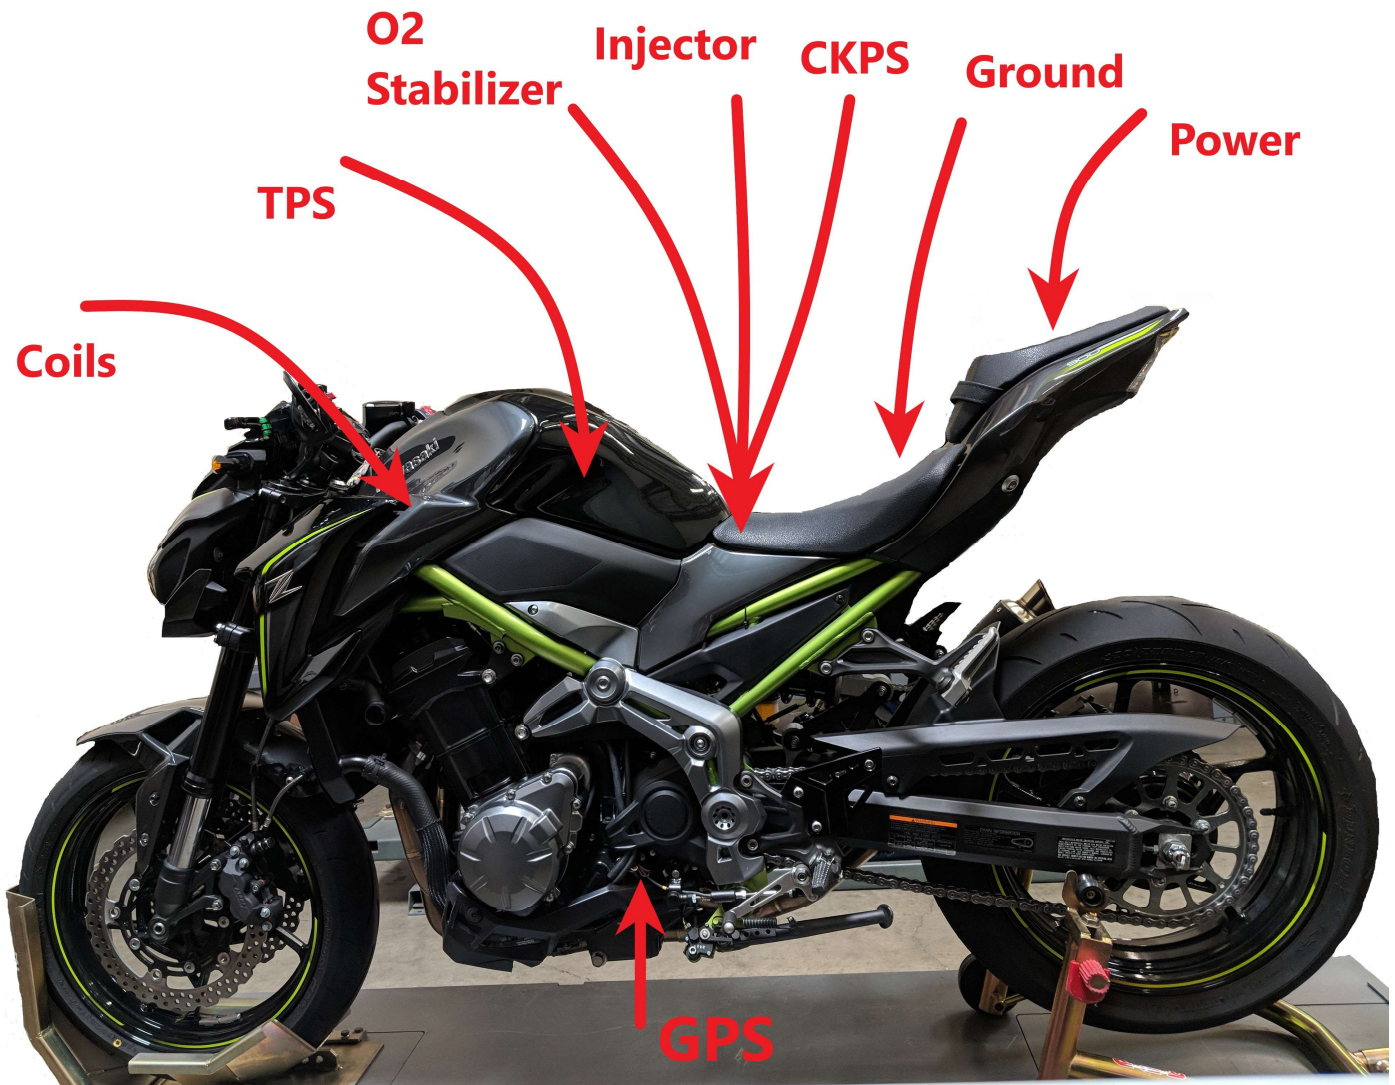


3>REMOVE

1. Seat
2. Left side panels
3. Right side panels
4. Air Box

4>ROUTE

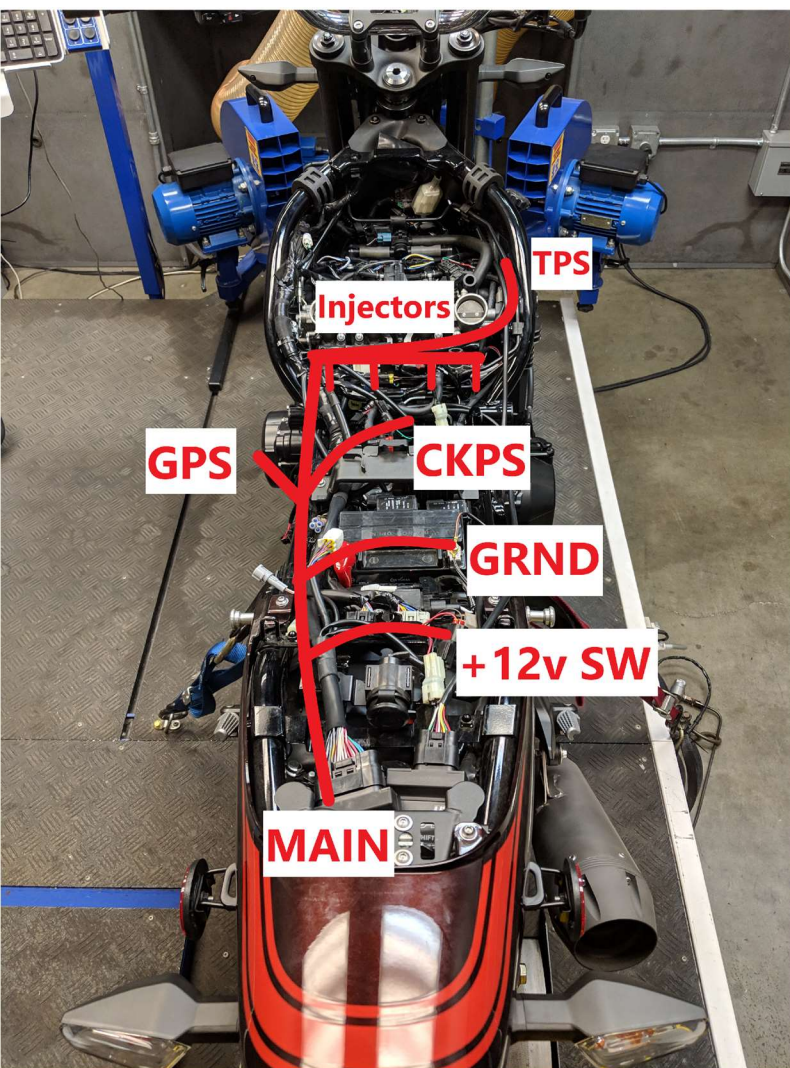

FUEL HARNESS

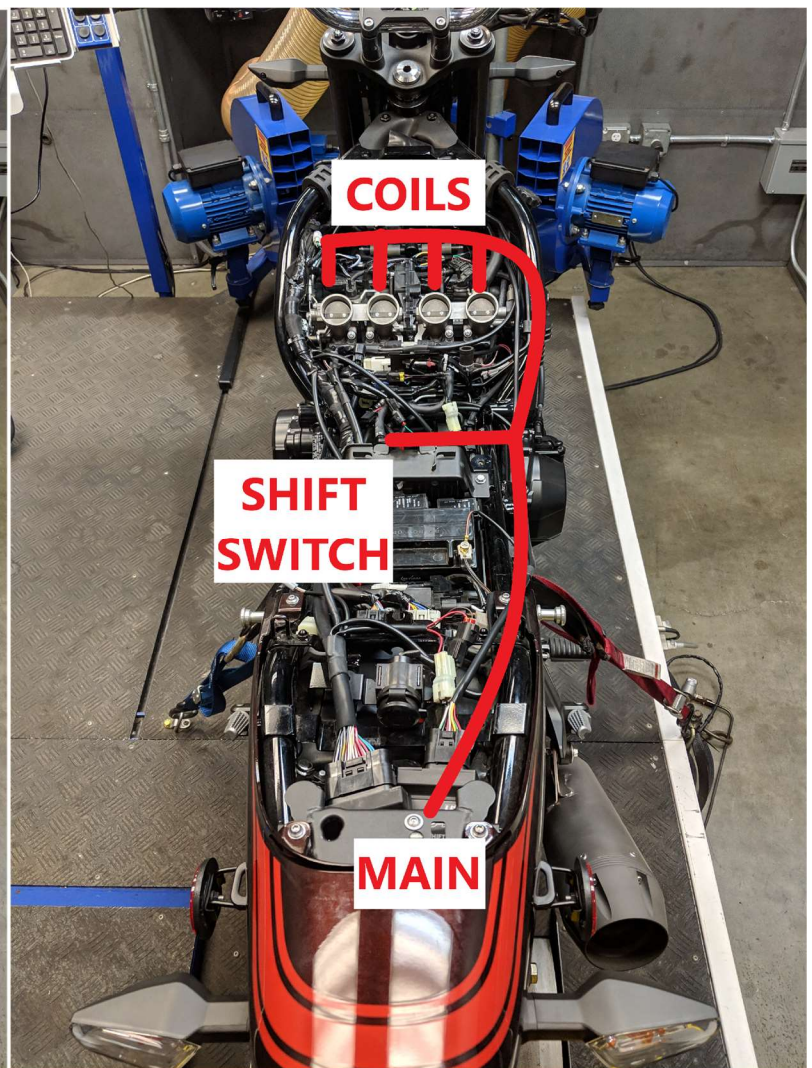

COIL HARNESS


POSITION OF ALL CONNECTIONS ARE THE SAME FOR BOTH Z900 AND THE Z900RS

1. Begin routing the Bazzaz fuel harness along the left side of the fuel tank and the coil harness along the right side of the fuel tank.
2. Route the Bazzaz Injectors and the Crank Case Position Sensor(CKPS) right below the Air Box.
3. Route the Bazzaz Gear Position Sensor towards the bottom of the front sprocket cover.
4. Route the Throttle Position Sensor (TPS) towards the right side of the throttle body.

4>ROUTE (CONT.)


1. Route the Bazzaz coil harness towards the right side and towards the coils.
2. Route the remaining connections towards where the battery is located behind the fuel tank and towards the tail section.
3. Let the fuel harness and coil harness hang in position.

5>CONNECT

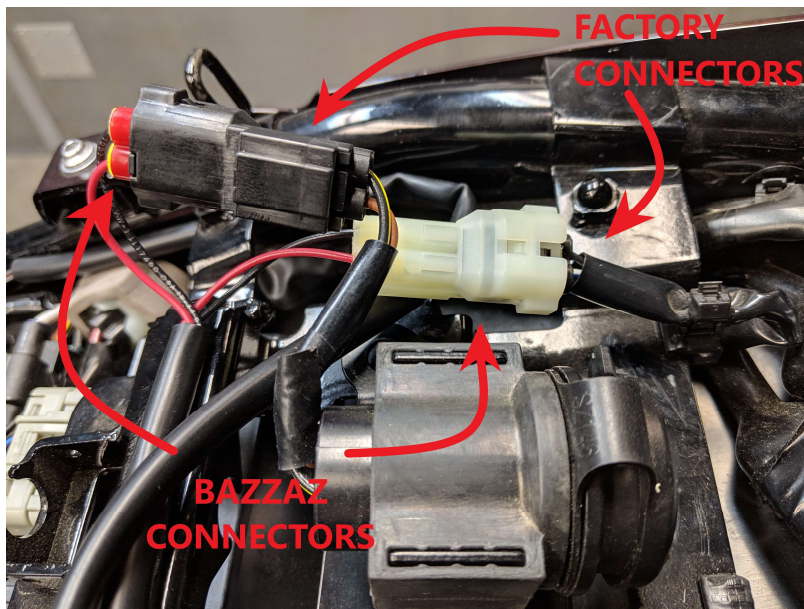

1. Locate the factory black two-pin +12v outlet connectors in the tail section of the bike.
2. Disconnect the factory connectors.
3. Connect the Bazzaz switched power connectors in-line with the factory connectors.


FOR Z900 ONLY

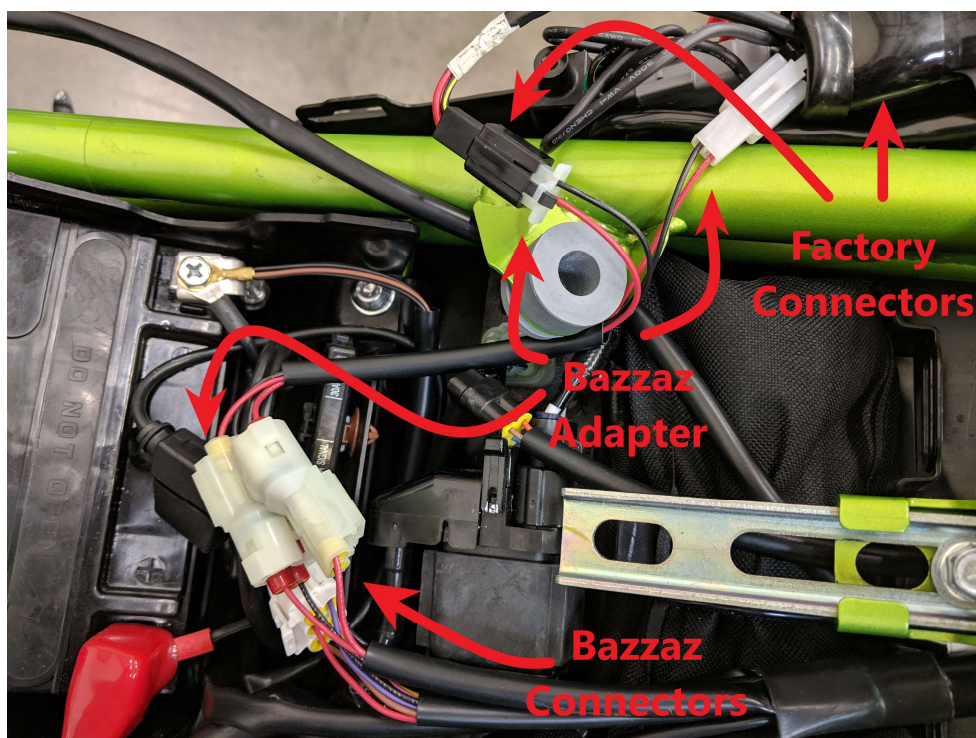

1. The standard Z900 have different connectors, hence a pair of adapters have been included in the kit.
2. Locate the 2-pin power connectors in the black rubber boot located on the left side of the rear seat.
3. Connect the adapter in-line with the factory connectors.
4. Connect the other end of the adapter in-line with the bazzaz harness +12v SW connectors.

6>GROUND



1. Locate the negative terminal on the battery under the seat section.
2. Remove the factory 10mm bolt.
3. Connect the Bazzaz ground lug with the negative terminal.
4. Replace factory bolt.

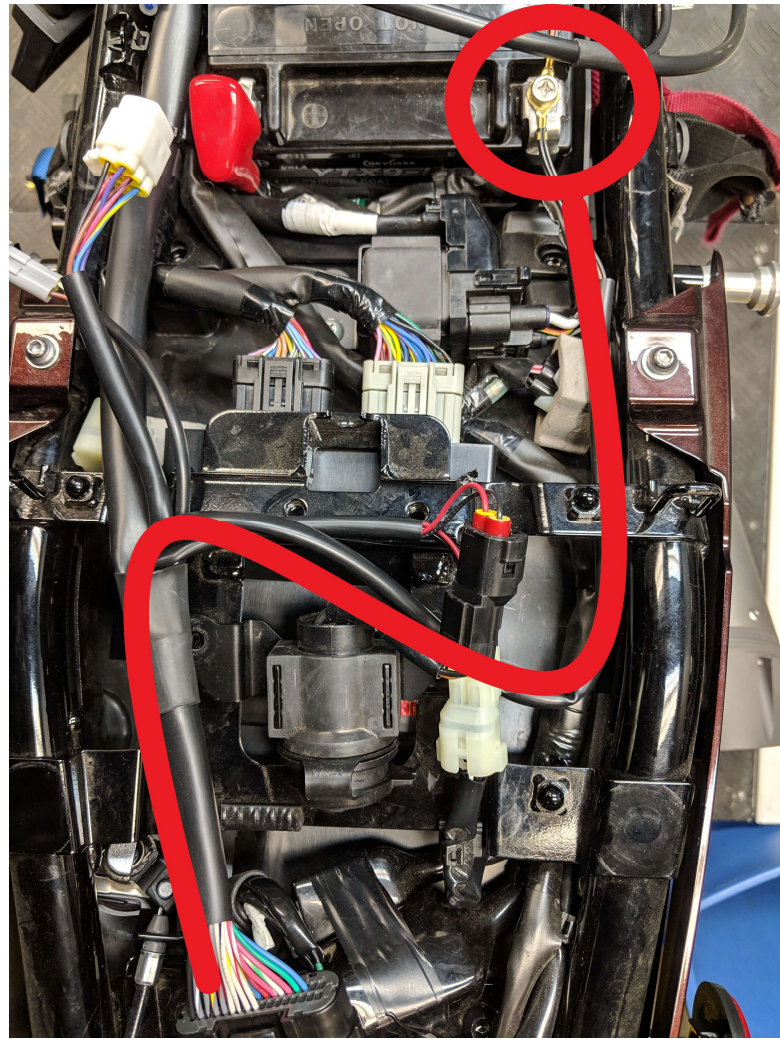

7>CONNECT

7.1



1. Locate the factory 2-pin CKPS connector which has a **BLACK** and **YELLOW** wire from the sensor side, and a **YELLOW** and **YELLOW&BLACK** wire from the harness side right below the Air Box.
2. Connect the Bazzaz connectors in-line with the factory connectors.

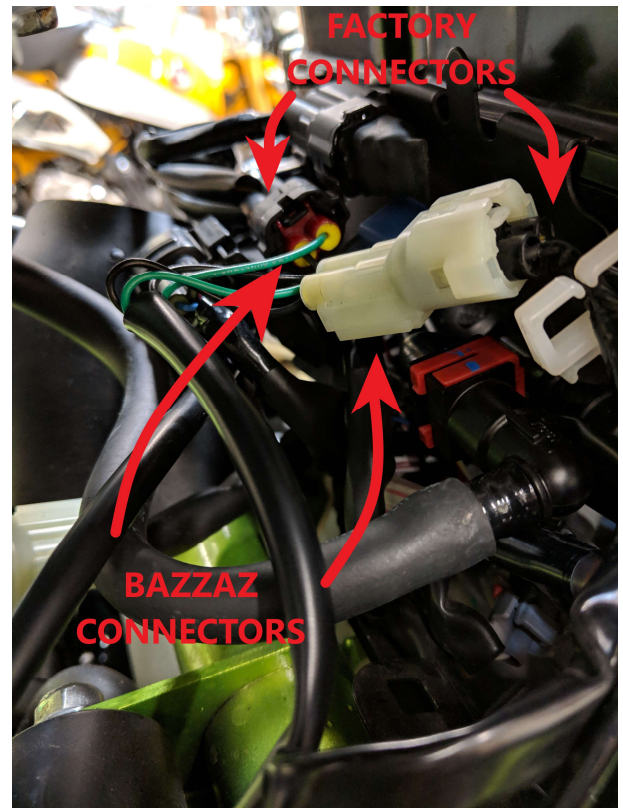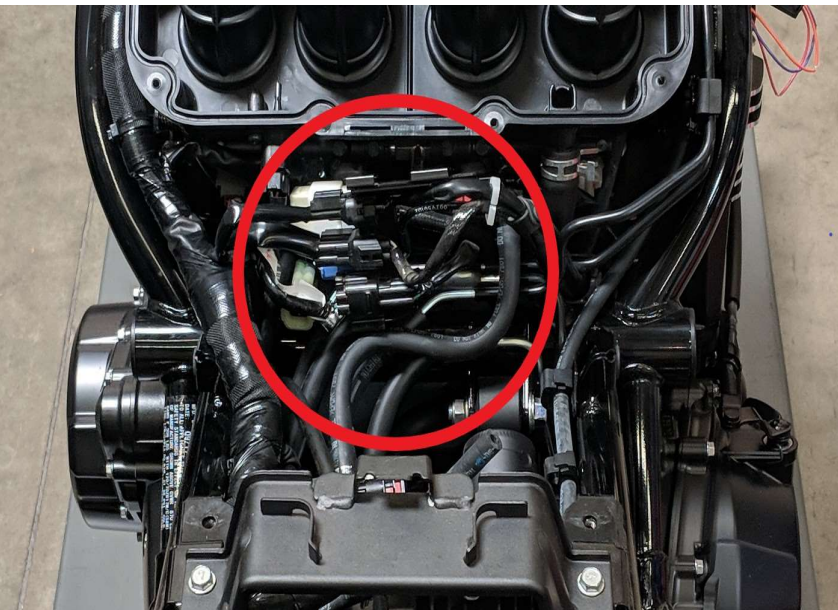

7>CONNECT (CONT.)

7.2




1. Locate the factory 3-Pin Gear Position Connector, which has a **GREEN**, **GREEN&RED** and a **LIGHT GREEN** wire.
2. The connector is located right below the front sprocket cover.
3. Connect the Bazzaz connectors in-line with the factory connectors.

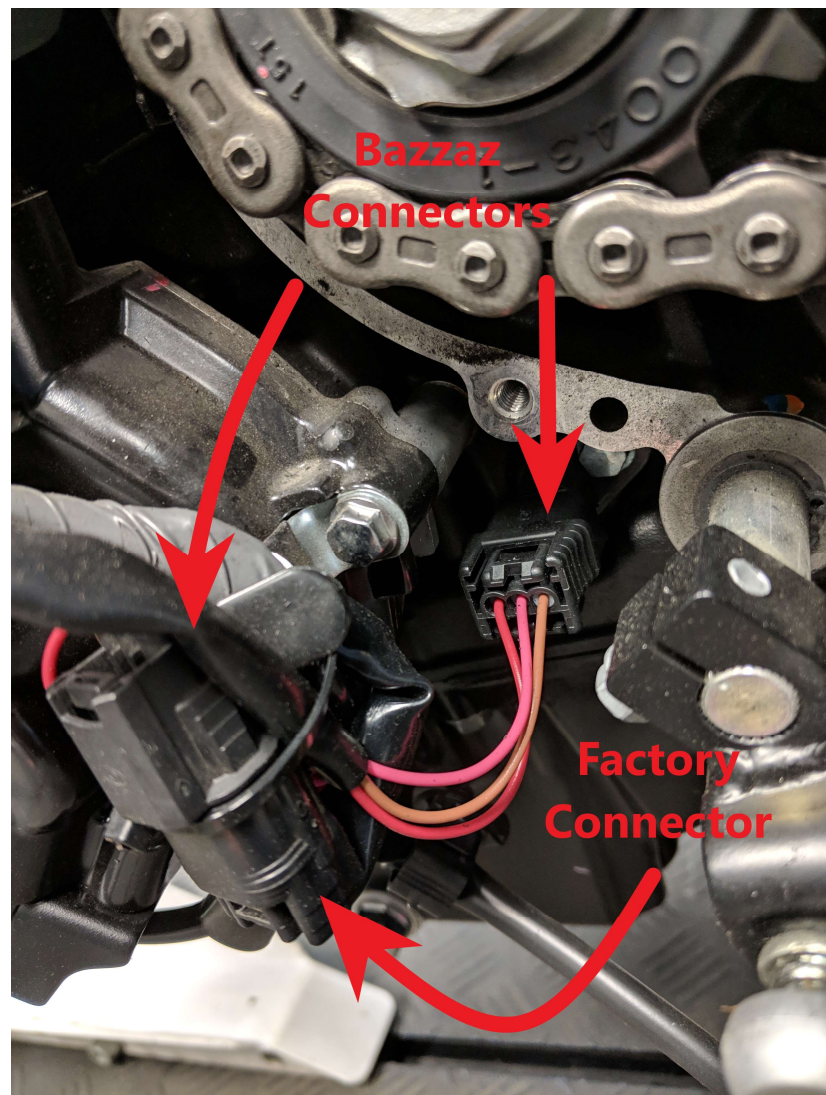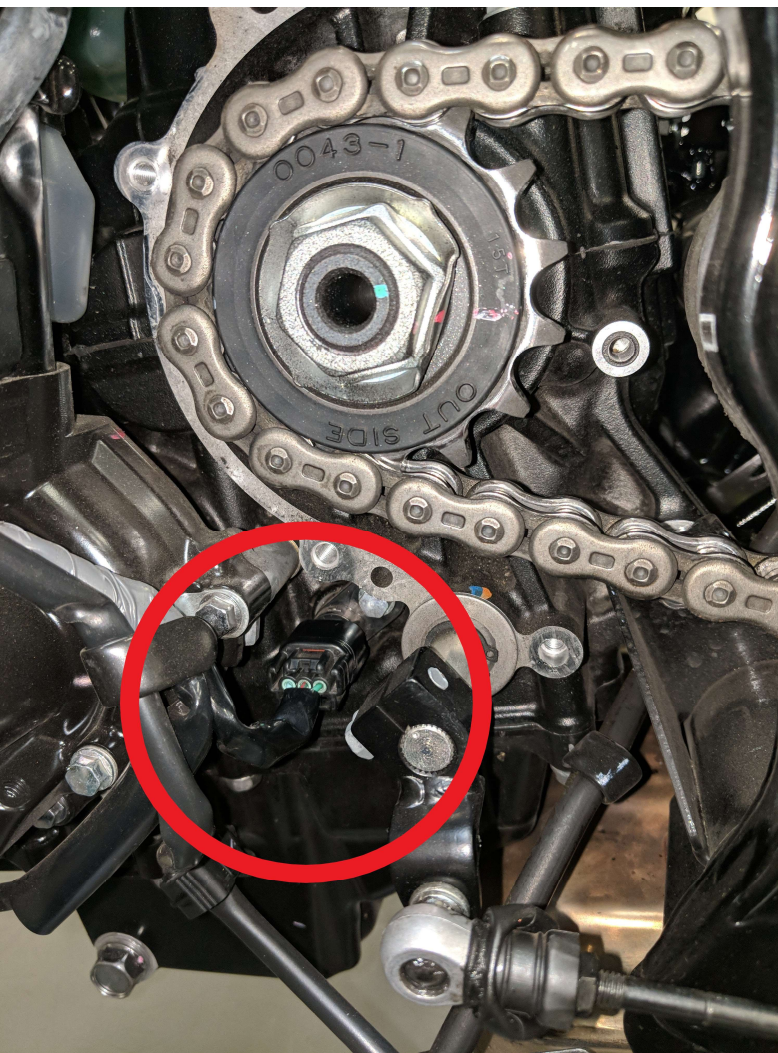

7>CONNECT (CONT.)

7.3

1. Locate the factory black three-pin TPS connector, located on the right side of the throttle body, which has a **BLUE**, **GREEN** and **YELLOW** wire
2. Disconnect the factory TPS connector from the sensor.
3. Connect the Bazzaz connectors in-line with the factory connectors.

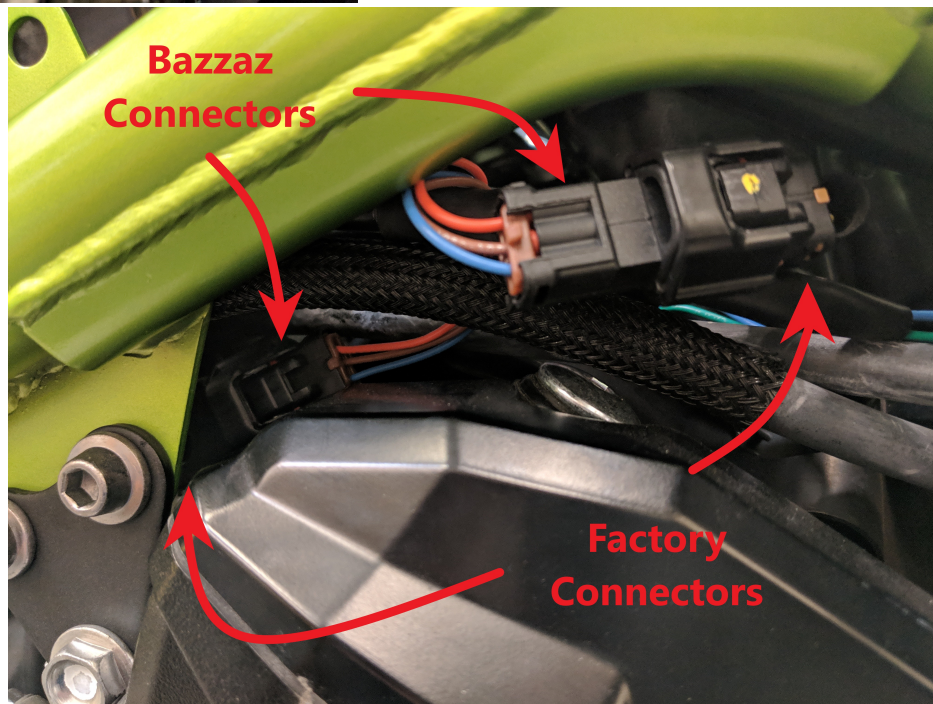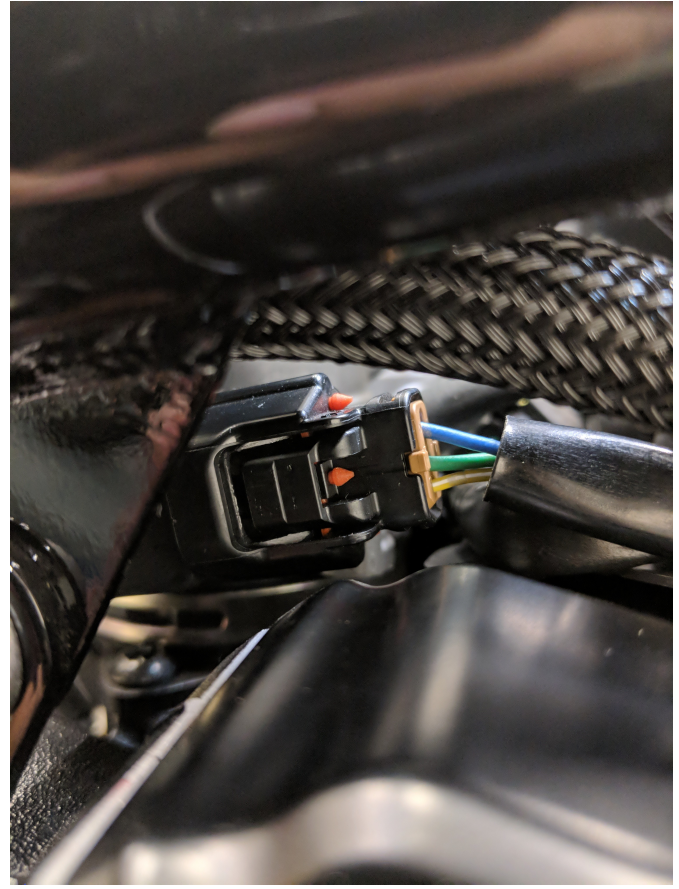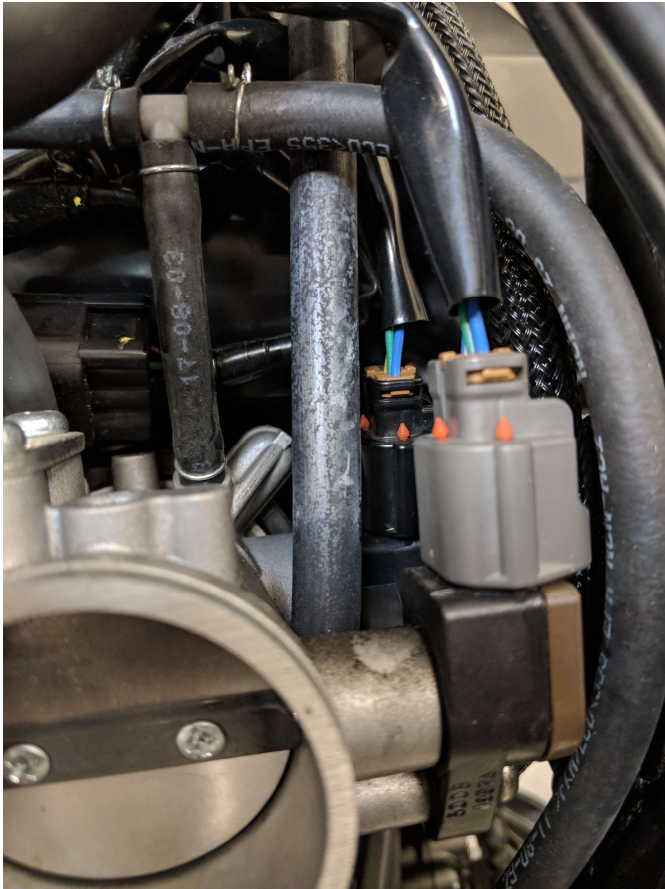


8>INJECTOR

8.1

1. Locate the factory grey two-pin injector connector found on the throttle body, under the Air Box.
2. Disconnect the factory injector connector from the injector.
3. Install the Bazzaz injector connectors in-line with the factory connectors.


PLEASE NOTE THE HARNESS LENGTH IS DESIGNED ACCORDING TO THE DISTANCE OF THE 4 INJECTORS IN AN ORDER. MAKE SURE THE ORDER IS FOLLOWED ACCORDING TO THEIR LENGTH.

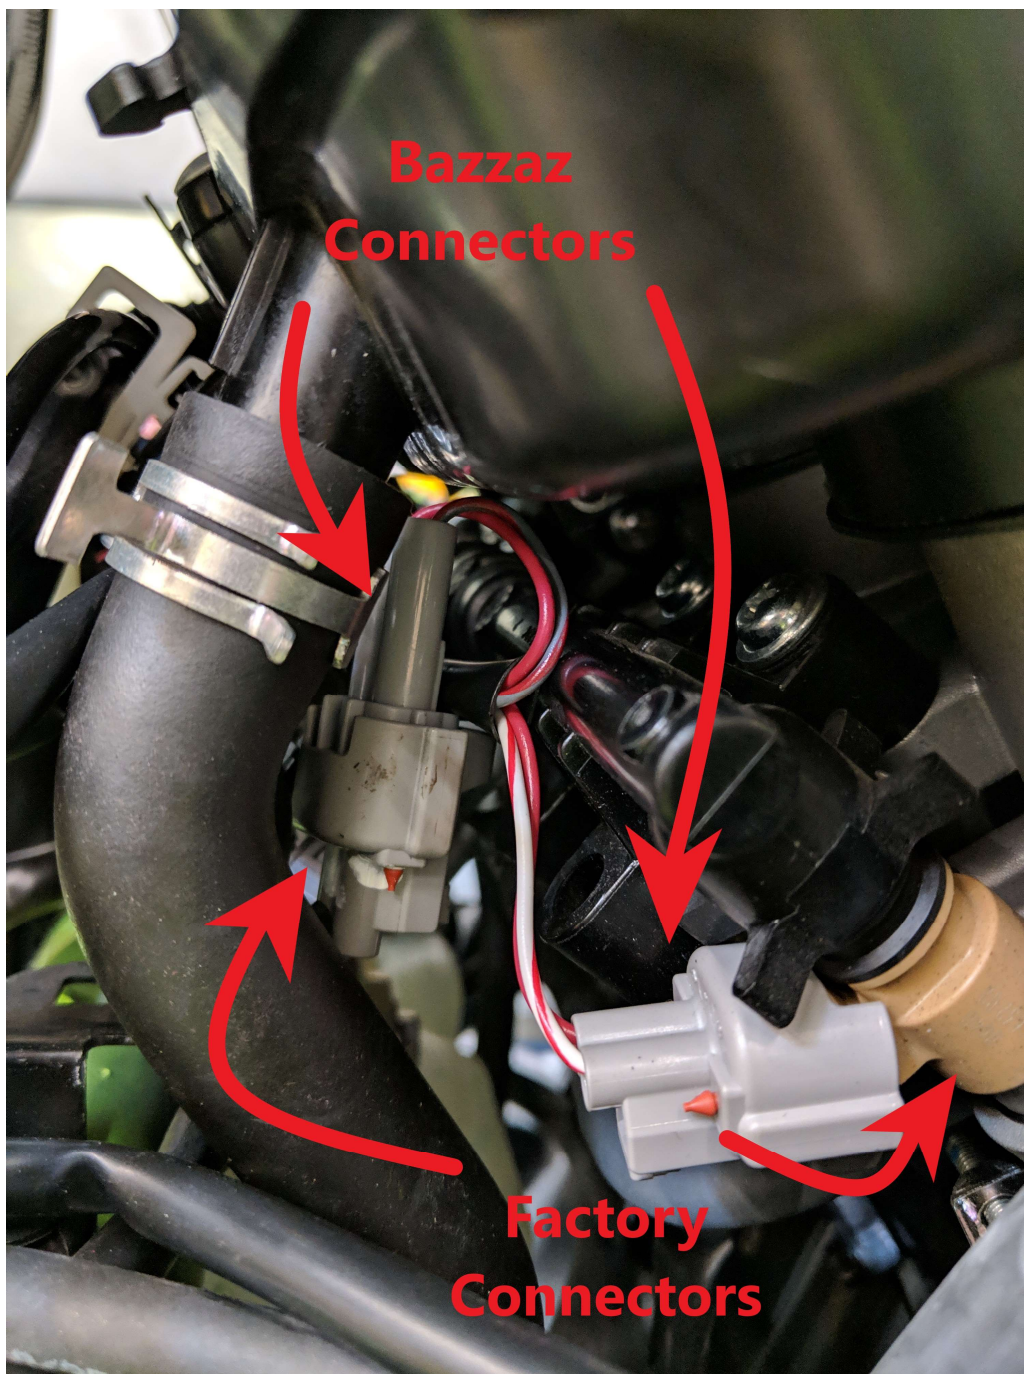

9>CONNECT


9.1

1. Connect the main connector of the Bazzaz coil harness to the control unit.
2. Route the Bazzaz coil harness along the right side of the Fuel Tank.
3. Locate the 4 factory coil connectors.
4. Disconnect the factory coil connector from the coil.
5. Connect the Bazzaz coil connectors in-line with the factory coil connector .

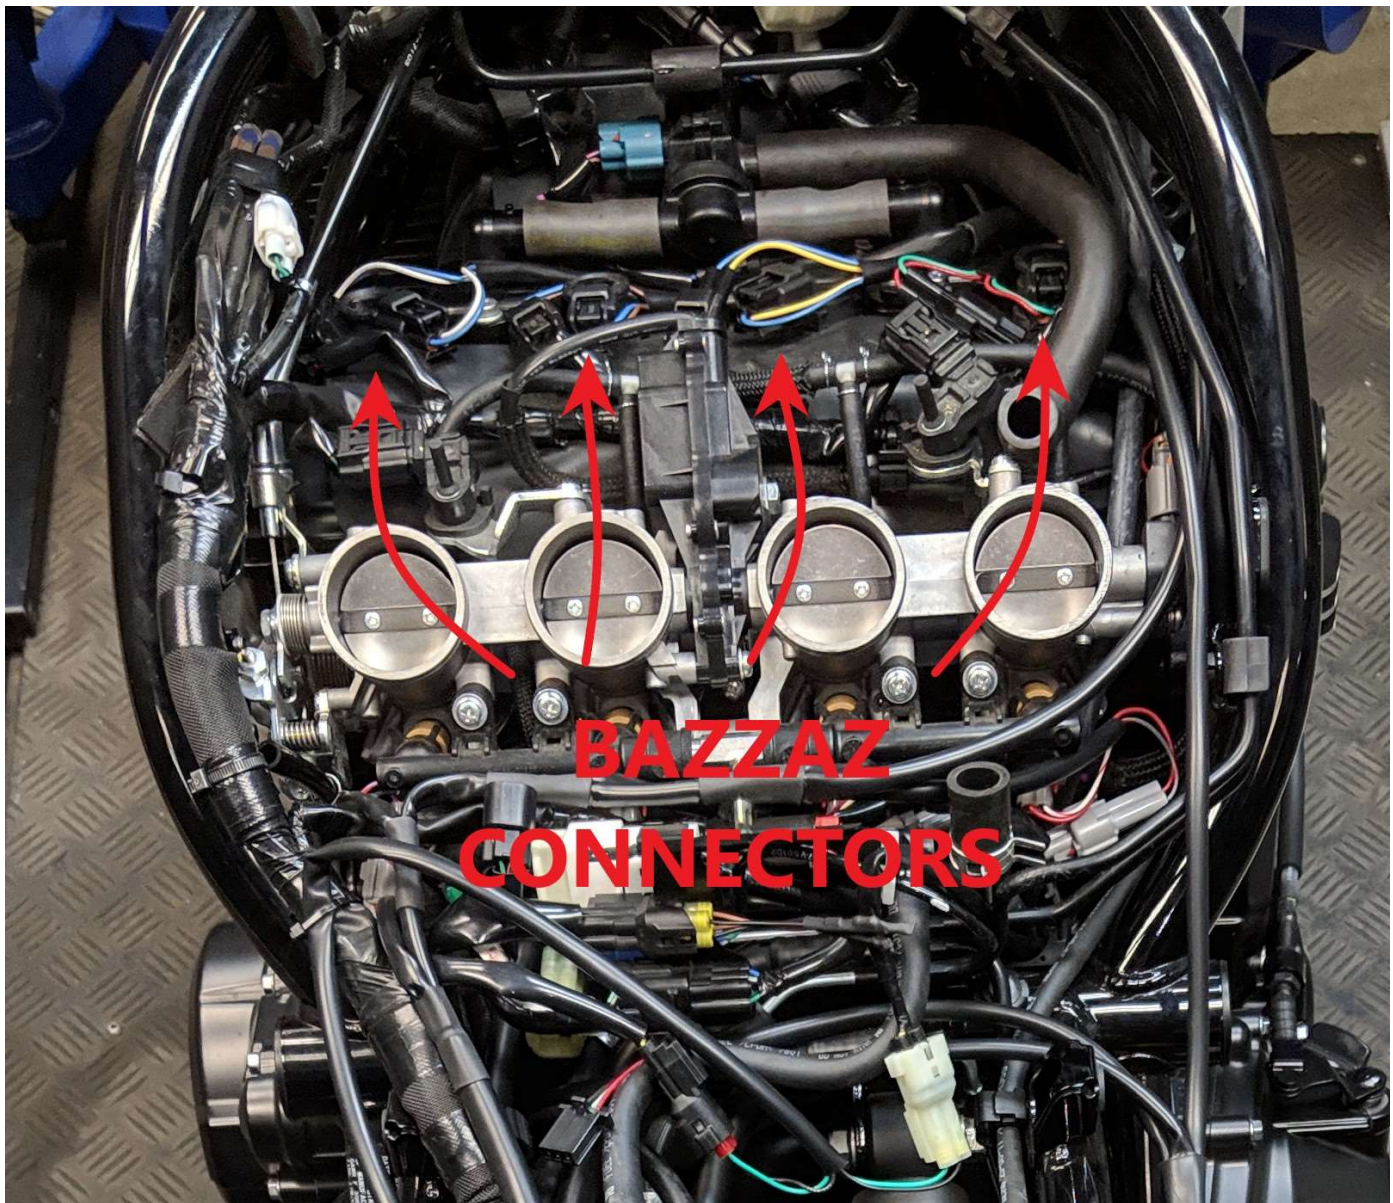


10>QUICKSHIFT

1. Shift Rod provided with the kit is for **STOCK SET-UP ONLY**. If after-market rear sets are installed, please measure the shift rod to the stock set-up and adjust the length accordingly.
2. The Shift Rod provided in the kit is 100mm in length. There are grooves allotted (10mm each) on the rod so that the length can be altered.
3. **Cut 4 grooves (40mm) for the Z900.**
4. **Cut 6 grooves (60mm) for the Z900RS.**
5. Route the Bazzaz shift switch connector to the mating connector of the Bazzaz coil harness and plug in-line.

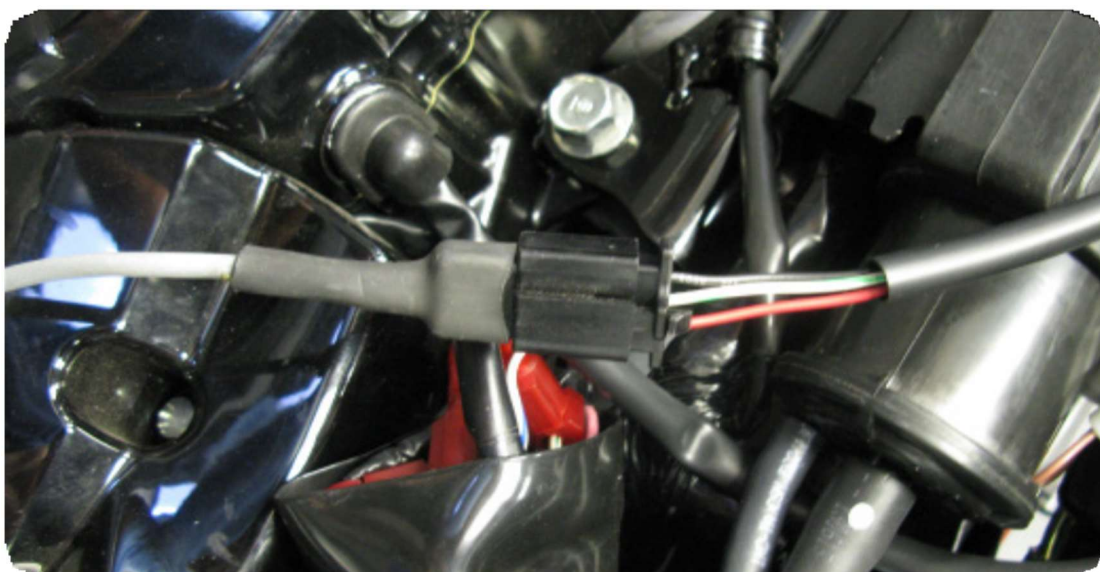

11>02 STABILIZER

1. Find the stock AFR sensor, unplug it from the stock OEM harness. Stow it away neatly on the bike using zip ties.
2. The stock OEM harness would be a 4-pin connector with 2 **BLACK**, a **BLUE** and a **WHITE** wire.
3. Or remove the O2 sensor completely and install a bung plug.
4. Connect the O2 stabilizer in-line to the OEM harness

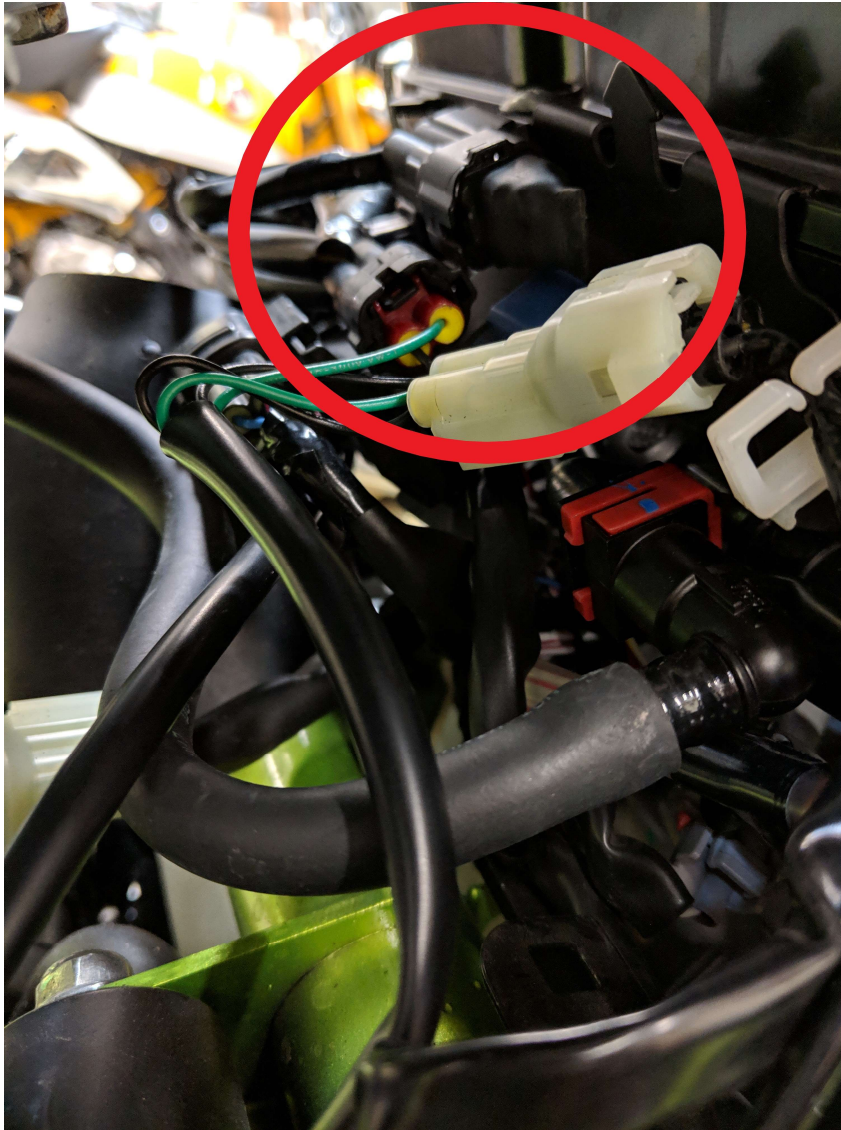

12>SECURE



Use the supplied cable ties to secure the harness neatly along the routing path **free of any moving or hot components (which could cause damage or failure of the system).**

13>CHECK

1. In order to check that the system is installed correctly, download the Bazzaz Z-Fi Mapper software at bazzaz.net.
2. Plug the USB cable into the control unit and computer.
3. Locate and open the Z-Fi Mapper software.
4. Check that the pre-programmed map matches the model of your bike on the fuel map page within the software. You can switch from map 1 to map 2 by unplugging the map select jumper on the Bazzaz fuel harness. Map 1 will be pre-programmed; depending on your model, there may be a pre-programmed map in the map 2 slot. If map 2 is blank, stock ECU settings are used. Make sure that the jumper is left plugged in or unplugged, depending on which map you choose.
5. Start the vehicle and begin to check that the following inputs read correctly on the fuel map page.
 - RPM - Make sure that the RPM is reading near what the vehicle is idling at.
 - GPS - The vehicle should read neutral (or whichever gear it is in). For motorcycles that use a Gear Position Sensor, the bike does not need to be running to do this. For motorcycles that use a speed sensor, the wheel must be spinning to read gear properly. This can be checked on a dynamometer or by using a rear stand. Use caution when testing componentry.
 - TPS - When throttle is applied, the TPS should read accordingly. Fly-by-wire models must be running to check TPS. Normal cable operated throttles can be checked with just the key on, not running.

Also use software to:

- View and/or make adjustments to fuel maps
- Activate Z-AFM self mapper (sold separately)
- Save and load new fuel maps
- Re-calibrate throttle position sensor after throttle modifications
- View diagnostics for troubleshooting
- Change quickshift settings
- Make traction control adjustments



If any problem is found, please carefully follow through the installation steps again.



If problem still persists, please contact Bazzaz tech support

- Factory support is available in the US at 909-597-8300.
- For fastest support outside of the US, find your local importer at bazzaz.net

14>REINSTALL

1. After it is determined that everything is correct, reinstall the components removed in step 3.
2. Mount the Z-Fi TC control unit to the Tail Section of the bike and secure it with velcro.
3. Connect the main connector of the Bazzaz fuel harness into the control unit.

15>USE MAPS

The Bazzaz controller is capable of storing two maps.

Map 1 consists of Z900 Slip-on Map

Map 2 consists of Z900RS Slip-on Map

Maps for STOCK and FULL SYSTEM can be downloaded from our website.

Switch maps by connecting or disconnecting the map select jumper supplied with the kit.

Or use the optional handlebar-mounted switch to switch maps on the fly (sold separately).



MAP 1



MAP 2

16>NEXT LEVEL

****Accessories purchased separately.**

MAP SELECT/ TC ADJUST SWITCH

Switch maps on the fly with this handle-bar-mounted switch. Quickly adjust traction control settings using a 10-point dial. Weatherproof toggle and easy installation.



129.95

ZAFM SELF MAPPER

Build race-level fuel maps for your specific modifications, fuel type, engine, and atmospheric conditions simply while riding. O2 sensor mounts into exhaust and control box easily plugs in to any Bazzaz Z-Fi product.



299.95

MAP SELECT SWITCH

Switch maps on the fly with this handle-bar-mounted switch. Weatherproof toggle and easy installation.



79.95

TC ACTIVE LIGHT

Illuminates when traction control is engaged. Helpful in determining when and where traction control is being actuated.



79.95



THE SMARTEST PERFORMANCE TUNING TECHNOLOGY



Proudly made in the
United States

T494

