



QS4USB INSTALLATION INSTRUCTIONS
2004-2007 CBR1000RR
PN's 403QSS, 403QSR

WARNING!

USE ONLY IN RACE OR OTHER CLOSED COURSE APPLICATIONS AND NEVER ON PUBLIC ROADS

PARTS LIST:

QS4USB Control Unit

Bazzaz Harness

Shift Switch

Shift Rod


DOWNLOAD Z-FI MAPPER SOFTWARE & ITS INSTRUCTIONS FROM WEBSITE

USB Cable

Velcro

Bazzaz stickers

Cable ties

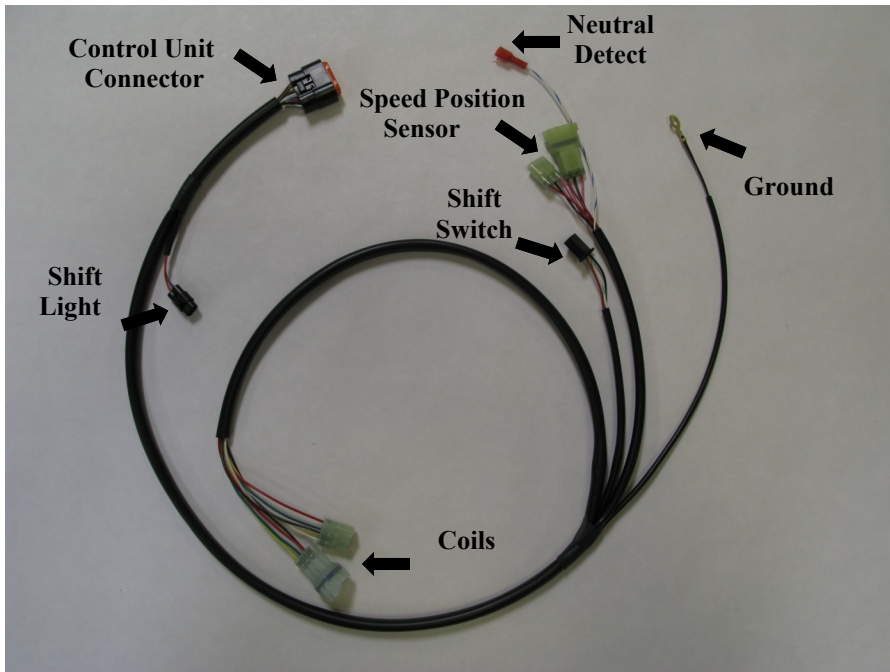

Read through all instructions before beginning installation. If any problem is found, please carefully follow through the installation steps again. If problem still persists, please call Bazzaz tech support department at (909) 597-8300.

**WE STRONGLY SUGGEST THAT AN EXPERIENCED TECHNICIAN
INSTALL THIS BAZZAZ PRODUCT**

1. To begin the installation; remove seat, fuel tank and right side fairing.
2. Place the QS4 USB control unit in the tail section of the bike. Secure it in place with the Velcro supplied with your kit.
3. Connect the large 18 pin connector on the Bazzaz harness to the QS4 USB control unit.
4. Route the Bazzaz harness on either side of the frame rail from the tail to the engine compartment. Locate the speed sensor connection between the sensor and the stock harness. Install Bazzaz harness inline with the sensor and stock harness connectors. (Photo 1)

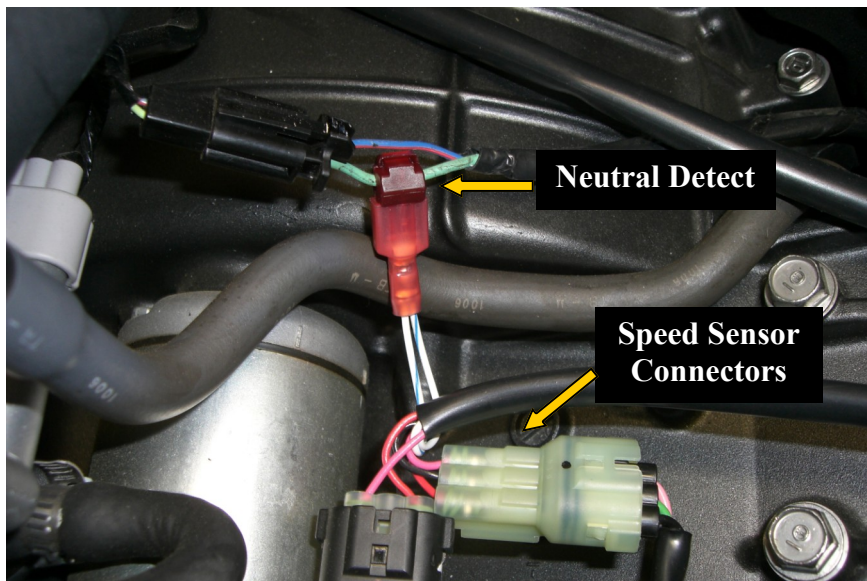


Photo 1

5. Install supplied scotchlok to TAP into green wire for Neutral Detect Sensor. Insert T-TAP from BAZZAZ harness with white/blue wire. (Photo 1)
6. Attach the ground lug from the Bazzaz harness to any solid chassis ground using one of the existing 8mm bolts. The crankcase breather or starter motor are recommended locations, making harness routing simple.
7. Once the speed sensor and ground lug connections are complete, continue to route the Bazzaz harness toward the front of the bike. Connect the Bazzaz harness in line with the ignition coil sub harness connectors on the stock harness which can be found on a mounting bracket behind the right side fairing. (Photo 2)

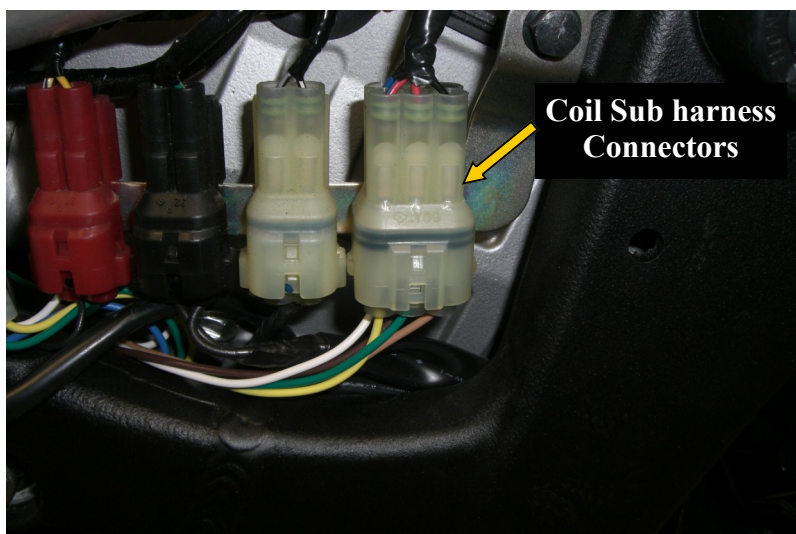


Photo 2

8. Remove the stock shift rod. In its place, first install the Bazzaz shift switch followed by the replacement shift rod supplied with the kit. Adjust the combined length of these components to allow for complete actuation of the shift shaft and also maintain a comfortable riding position. Once the desired length is established tighten the 10mm nuts to secure the switch and rod in place. Route the wiring lead of the shift switch sensor into the engine compartment and connect it with the mating connector on the Bazzaz harness. Secure any excess wiring length away from any hot or moving components on the bike, as contact with these components may cause damage or failure to the sensor. (Photo 3)

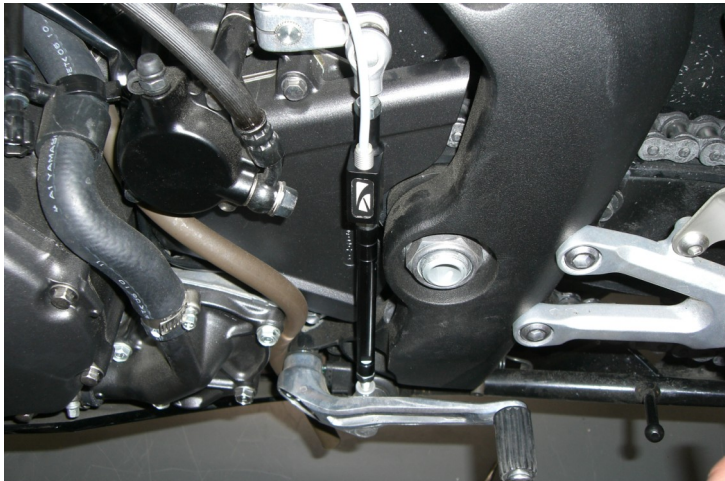


Photo 3

Notes: (1) The female end of Bazzaz shift switches are cross tapped to allow them to be mounted to either the rear set or shift shaft heim joint regardless of the thread design. (2) If the replacement rod supplied with your kit contains female style ends, it is designed to allow the user to shorten its length to suit various aftermarket reset configurations. The female style rods contain grooves in 10mm increments on both ends identifying areas where the rod can be modified and adequate threads will remain for proper installation.

9. Now that the Bazzaz hardware installation is near complete please take a moment to secure the Bazzaz harness along its routing path with cable ties. Secure wiring away from any hot or moving components on the bike, as contact with these components may cause system damage or failure. Reinstall components removed in step 1.